unilli

TYRE

Security Performance Durability

www.unilli.com

COMPANY INTRODUCTION

ACME RUBBER IND. CO., LTD. a subsidiary of UNILLI TYRE INTERNATIONAL CO., LTD. is a specialized manufacturer of tyres. We produce various kinds and sizes of pneumatic rubber tyres and sell them to all over the world.

Tyre is a capital intensive and technical intensive industry.
Acme Rubber Ind. Co., Ltd has advanced equipments, perfect developments and quality examination and high efficient management. We insist that quality is the most Important thing, and supply customers with the best products. We keep designing new products to meet market demands due to rapidly market change.

Though we are not the most famous tyre manufacturer, we have team of professional technicians & marketing staffs that we can supply you any of product you require from us. Acme Rubber Ind. Co., Ltd is your best choice.

www.unilli.com

01 SCOOTER-STREET
16 SCOOTER-DUAL SPORT
18 MOTORCYCLE-STREET
31 MOTORCYCLE-DUAL SPORT
35 MOTOCROSS
39 ATV
46 SLICK KART
48 DIRT&RAIN KART

unilli

For Scooter Street

100

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

100A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/80-12	50L	90	3.5	449	17.7	2.15	190	419	36	250
90/90-12	54L	90	3.5	467	18.4	2.15	212	467	36	250

100N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

161

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	220
120/70-12	51L	122	4.8	473	18.6	3.5	195	430	32	220
130/70-12	56L	129	5.1	487	19.2	3.5	224	494	32	220

163

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250

167

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250

168

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250

168A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/80-10	4	90	3.5	398	15.7	2.15	175	386	36	250

169

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
80/80-10	41J	80	3.1	382	15.0	1.85	145	320	36	250
80/90-10	44J	80	3.1	398	15.7	1.85	160	353	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250
140/70-12	60L	139	5.5	501	19.7	3.75	250	551	32	225
110/90-13	56P	109	4.3	528	20.8	2.5	218	481	32	225
120/70-13	53P	122	4.8	498	19.6	3.5	206	454	32	225
130/70-13	57P	129	5.1	512	20.2	3.5	230	507	32	225
120/80-14	58P	120	4.7	552	21.7	2.75	236	520	32	225

170

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

173

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-12	64L	112	4.4	513	20.2	2.5	280	617	36	250
120/70-14	55S	124	4.9	530	20.9	3.5	218	481	32	225

175

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
140/60-13	57S	136	5.4	504	19.8	3.75	230	507	32	225
110/80-14	53P	112	4.4	536	21.1	2.5	206	454	32	225

2006

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

2021

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

2022

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50L	90	3.5	420	16.5	2.15	190	419	36	250
3.50-10	51L	94	3.7	552	21.7	2.5	195	430	36	250
100/90-10	56L	100	3.9	440	17.3	2.5	224	494	36	250
110/70-12	47L	110	4.3	462	18.2	3.0	175	386	32	225
120/70-12	51L	121	4.8	475	18.7	3.5	195	430	32	225
130/70-12	56L	130	5.1	490	19.3	3.5	224	494	32	225

300

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

Scooter Street

500

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

501

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

501A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/80-10	58L	109	4.3	430	16.9	2.5	236	520	36	250

501F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	225

502

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	80	3.1	413	16.3	2.15	150	331	36	250
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
80/90-10	44J	80	3.1	398	15.7	1.85	160	353	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	32	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	32	250

502A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/80-10	53L	101	4.0	414	16.3	2.5	206	454	36	250
80/100-10	50J	80	3.1	414	16.3	1.85	190	419	36	250

502N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	80	3.1	413	16.3	2.15	150	331	36	250

510

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250

511

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-10	56J	109	4.3	452	17.8	2.5	257	567	36	250
120/80-10	63L	119	4.7	446	17.6	2.75	265	584	36	250
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225

513

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-10	53L	101	4.0	414	16.3	2.5	206	454	36	250
120/70-10	48L	122	4.8	422	16.6	3.5	180	397	32	225

Scooter Street

528

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-12	59L	100	3.9	482	19	2.5	243	536	36	250

530

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/80-12	65L	122	4.8	490	19.3	2.75	290	639	36	250

557N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-10	58L	100	3.9	442	16.6	2.5	206	454	36	250

PRO MAX 558A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	59L	98	3.8	436	17.2	2.5	195	430	36	250
90/90-10	55L	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	61L	101	4.0	436	17.2	2.5	224	494	36	250
100/90-12	59L	101	4.0	485	19.1	2.5	243	536	36	250
110/70-12	53M	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	58M	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	62M	126	5.0	492	19.4	3.5	224	494	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
120/70B13	59P	122	4.8	498	19.6	3.50	243	536	40	275
130/70B13	63P	129	5.1	510	20.0	3.50	272	600	40	275
140/70B13	66P	142	5.6	528	20.8	3.75	300	661	40	275

558N 2

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	98	3.9	436	17.2	2.5	195	430	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225
120/70-13	53P	118	4.6	495	19.5	3.5	206	454	32	225
130/70-13	57P	128	5.0	515	20.3	3.5	230	507	32	225
110/70-13	48P	104	4.1	480	18.9	3.0	180	397	32	225
100/80-14	55P	98	3.8	516	20.3	2.5	218	481	32	225

588

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-14	57P	101	4.0	536	21.1	2.5	230	507	32	225

591

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50L	90	3.5	416	16.4	2.15	190	419	36	250

600

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

Scooter Street

601

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
130/70-13	57P	128	5	515	20.3	3.5	230	507	32	225

601F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-12	47L	110	4.3	462	18.2	3	175	386	32	225
120/70-13	53P	118	4.6	495	19.5	3.5	206	454	32	225

7101

White Wall

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-8	4	96	3.8	386	15.2	2.5	170	375	36	250
4.00-8	4	96	3.8	386	15.2	2.5	218	481	36	250
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250

776

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250

777

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250

Scooter Street

7863

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250
110/70-12	47L	110	4.3	462	18.2	3.0	175	386	32	225
120/70-12	51L	121	4.8	475	18.7	3.5	195	430	32	225
130/70-12	56L	130	5.1	490	19.3	3.5	224	494	32	225

7863A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250

888

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

9815

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250

Scooter Street

9816N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

A2000

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

B21

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

CT99

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	55L	88	3.5	414	16.3	2.15	218	480	44	300
100/90-10	61L	101	4.0	436	17.2	2.50	257	567	44	300
100/90-12	64M	101	4.0	485	19.1	2.50	280	617	44	300
110/70-12	53M	104	4.1	464	18.3	3.00	206	454	40	275
120/70-12	58M	114	4.5	478	18.8	3.50	236	520	40	275
120/80-12	70M	125	4.9	495	19.5	2.75	335	738	44	300
130/70-12	62M	126	5.0	492	19.4	3.50	265	584	40	275

DS1

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250

DX1

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/90-10	44J	80	3.1	398	15.7	1.85	160	353	36	250
110/70-13	48P	104	4.1	480	18.9	3.0	180	397	32	225
100/80-14	55P	98	3.8	516	20.3	2.5	218	481	32	225

GP98

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	98	3.9	436	17.2	2.5	195	430	36	250
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56L	101	4.0	436	17.2	2.5	224	494	36	250
90/90-12	54L	92	3.6	464	18.3	2.15	212	467	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225
120/70-13	53P	122	4.8	498	19.6	3.5	206	454	32	225
130/70-13	57P	129	5.1	512	20.2	3.5	230	507	32	225

GS1

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250
110/70-12	47L	110	4.3	459	18.1	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

M50

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-13	48P	104	4.1	480	18.9	3.0	180	397	32	225
100/80-14	55P	98	3.8	516	20.3	2.5	218	481	32	225

M60

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-13	48P	104	4.1	480	18.9	3.0	180	397	32	225
100/80-14	55P	98	3.8	516	20.3	2.5	218	481	32	225

S-05

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250

S-097

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	97	3.8	434	17.1	2.5	224	494	36	250

S-099

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	97	3.8	434	17.1	2.5	224	494	36	250

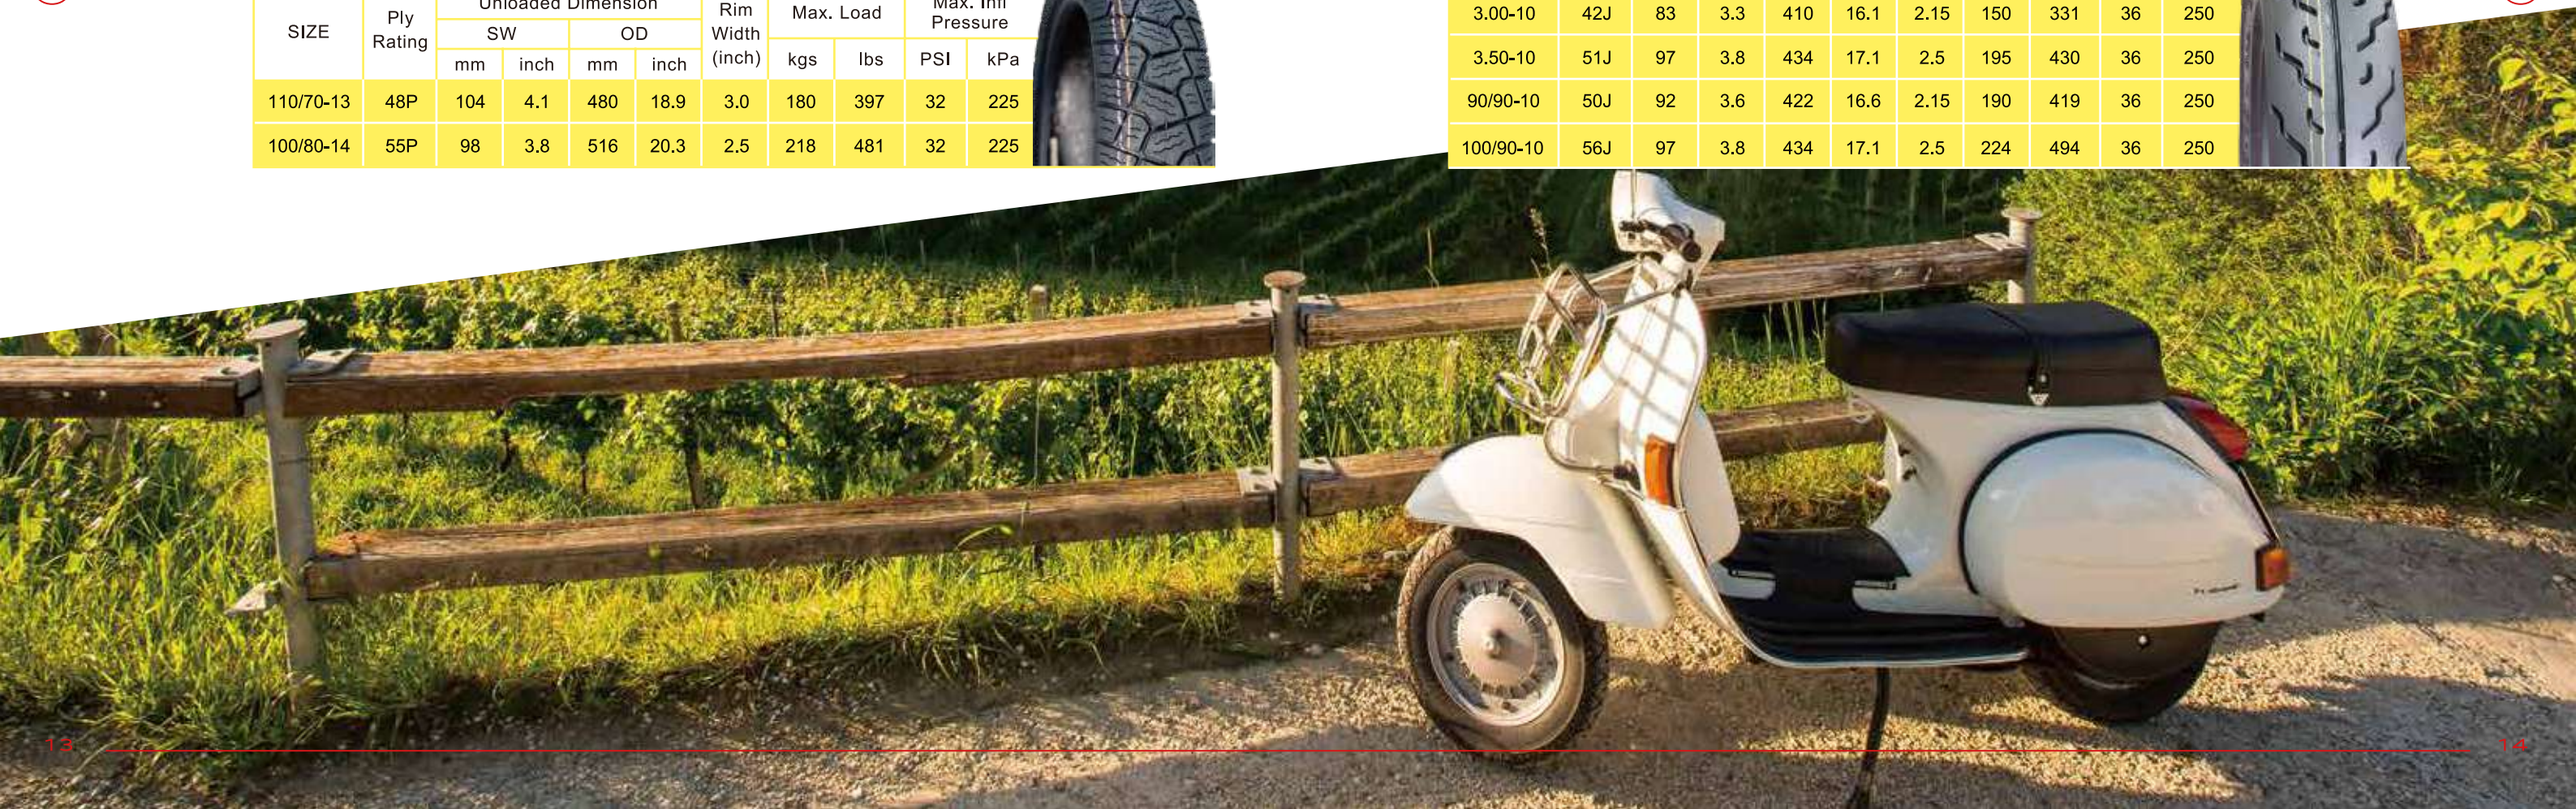

SR911

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-10	50J	88	3.5	414	16.3	2.15	190	419	36	250
100/90-10	56J	101	4.0	436	17.2	2.5	224	494	36	250
110/70-12	47J	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

W2

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

W3

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
90/90-10	50J	92	3.6	422	16.6	2.15	190	419	36	250
100/90-10	56J	102	4.0	435	17.1	2.5	224	494	36	250
110/70-12	47L	104	4.1	464	18.3	3.0	175	386	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225

W5N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	92	3.6	437	17.2	2.5	195	430	36	250
90/90-10	50J	90	3.5	416	16.4	2.15	190	419	36	250
100/90-10	56J	101	4.0	434	17.1	2.5	224	494	36	250

Scooter Dual Sport

512

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-10	54J	109	4.3	452	17.8	2.5	257	567	36	250
120/90-10	57J	119	4.7	470	18.5	2.75	230	507	36	250
130/90-10	61J	129	5.1	488	19.2	3.0	257	567	36	250

516

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
110/80-10	58L	109	4.3	430	16.9	2.5	236	520	36	250
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225
120/80-12	65L	125	4.9	495	19.5	2.75	290	639	36	250
130/70-12	56L	126	5.0	492	19.4	3.5	224	494	32	225
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225

517

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-10	51J	97	3.8	434	17.1	2.5	195	430	36	250
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225

7308

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-10	42J	83	3.3	410	16.1	2.15	150	331	36	250

9813

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/70-10	48L	122	4.8	422	16.6	3.5	180	397	32	225
120/70-12	51L	114	4.5	478	18.8	3.5	195	430	32	225

For Motorcycle Street

106

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

166

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-16	36P	69	2.7	532	20.9	1.6	125	276	32	225
80/90-16	43P	80	3.1	550	21.7	1.85	155	342	32	225
90/90-16	48P	99	3.9	580	22.8	2.15	180	397	32	225
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

169

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-14	34P	70	2.8	484	19.1	1.6	118	260	32	225
80/90-14	40P	78	3.1	504	19.8	1.85	140	309	32	225
90/90-14	46P	90	3.5	518	20.4	2.15	170	375	32	225
120/80-14	58P	120	4.7	552	21.7	2.75	236	520	32	225
90/80-17	46P	88	3.5	576	22.7	2.15	170	375	32	225

173

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-17	49P	93	3.7	596	23.5	2.15	185	408	32	225
100/90-17	55P	105	4.1	611	24.1	2.5	218	481	32	225

173FR

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/70-16	53P	110	4.3	564	22.2	3.0	206	454	32	225

175

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
130/80-15	63P	130	5.1	594	23.4	3.0	272	600	32	225
110/80-17	57P	110	4.3	612	24.1	2.5	230	507	32	225

188



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

300

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/100-14	37P	72	2.8	495	19.5	1.6	128	282	32	225
80/100-14	43P	81	3.2	508	20.0	1.85	155	342	32	225

558A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/90-17	44P	78	3.1	580	22.8	1.85	160	353	32	225

7102



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225
2.50-17	38L	68	2.7	568	22.4	1.6	132	291	32	225
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225

7103

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-17	41M	74	2.9	586	23.1	1.85	145	320	32	225
3.00-18	47P	80	3.1	627	24.7	1.85	175	386	32	225
2.50-19	41P	66	2.6	624	24.6	1.6	145	320	32	225
2.75-19	43P	78	3.1	646	25.4	1.85	155	342	32	225

7103A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	45P	80	3.1	602	23.7	1.85	165	364	32	225

Motorcycle-Street

7103

WhiteWall

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
5.00-15	69P	129	5.1	641	25.2	3.0	325	716	32	225
5.00-16	71P	129	5.1	666	26.2	3.0	345	761	32	225
4.00-18	64P	108	4.3	674	26.5	2.15	280	617	32	225
4.50-18	70P	111	4.4	691	27.2	2.15	335	739	32	225
4.00-19	65P	108	4.3	700	27.6	2.15	290	639	32	225

7105

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.50-16	52P	93	3.7	598	23.5	2.15	200	441	32	225
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
3.25-18	52P	88	3.5	639	25.2	2.15	200	441	32	225

7105Q

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225

7106

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.25-17	33L	61	2.4	556	21.9	1.6	115	254	32	225
2.50-17	38L	68	2.7	568	22.4	1.6	132	291	32	225
3.60-H18	64H	93	3.7	648	25.5	2.15	230	507	32	225
3.25-19	54P	88	3.5	665	26.2	2.15	212	467	32	225
3.50-19	57P	93	3.7	675	26.6	2.15	230	507	32	225

7107

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.25-18	52P	88	3.5	639	25.2	2.15	200	441	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225



7108

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.50-17	38M	68	2.7	568	22.4	1.6	132	291	32	225
2.50-18	40P	65	2.6	593	23.3	1.6	140	309	32	225
3.00-21	51P	78	3.1	706	27.8	1.85	195	430	32	225



7108A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225



7108B

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.25-17	33L	61	2.4	556	21.9	1.6	115	254	32	225

7109

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	45P	80	3.1	602	23.7	1.85	165	364	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47P	80	3.1	627	24.7	1.85	175	386	32	225

Motorcycle-Street

7110

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225
90/90-19	52P	90	3.5	645	25.4	2.15	200	441	32	225
100/90-19	57P	101	4.0	663	26.1	2.5	230	507	32	225

7111



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-16	40M	73	2.9	556	21.9	1.85	140	309	32	225
2.50-17	43M	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41M	74	2.9	586	23.1	1.85	145	320	32	225
3.00-17	45M	88	3.5	616	24.3	1.85	165	364	32	225
2.75-18	42M	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47M	88	3.5	641	25.2	1.85	175	386	32	225

7112

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	50P	80	3.1	602	23.7	1.85	165	364	32	225

7116

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
5.00-15	69P	129	5.1	641	25.2	3.0	325	716	32	225
5.00-16	71P	132	5.2	670	26.4	3.0	345	761	32	225
4.00-18	64P	113	4.4	685	27.0	2.15	280	617	32	225
4.00-19	65P	110	4.3	705	27.8	2.15	290	639	32	225

7121



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-18	42P	70	2.8	615	24.2	1.85	150	331	32	225

7312

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/90-16	63P	120	4.7	625	24.6	2.75	272	600	32	225

7325

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
130/60-13	53J	129	5.1	486	19.1	3.5	206	454	32	225
300-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
90/90-19	52P	90	3.5	645	25.4	2.15	200	441	32	225

7501



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
300-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
300-18	51P	90	3.5	619	24.4	2.15	195	430	32	225

7860

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-17	46P	81	3.2	595	23.4	1.85	170	375	32	225
90/90-17	49P	93	3.7	596	23.5	2.15	185	408	32	225
2.75-18	42P	70	2.8	615	24.2	1.85	150	331	32	225

7862

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-17	55P	105	4.1	611	24.1	2.5	218	481	32	225
110/80-17	57P	110	4.3	612	24.1	2.5	230	507	32	225
120/80-17	61S	122	4.8	624	24.6	2.75	257	567	32	225
100/90-18	56P	102	4.0	640	25.2	2.5	224	494	32	225

9005

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.50-17	38P	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41P	74	2.9	586	23.1	1.85	145	320	32	225

9006

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-14	43P	80	3.1	516	20.3	1.85	155	342	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.50-18	56P	93	3.7	648	25.5	2.17	224	494	32	225

9006S

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
80/100-18	47P	80	3.1	617	24.3	1.85	175	386	32	225

9007

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-17	52P	101	4.0	592	23.3	2.5	200	441	32	225
110/80-17	57P	110	4.3	612	24.1	2.5	230	507	32	225

9008

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225

Motorcycle-Street

9010W

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
80/100-18	47P	80	3.1	617	24.3	1.85	175	386	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225

9012

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/90-18	56P	102	4.0	640	25.2	2.5	224	494	32	225

9023

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
2.75-17	41P	74	2.9	586	23.1	1.85	145	320	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225

9025

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225

9810

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18 (3.00-18)	51P	90	3.5	619	24.4	2.15	195	430	32	225
100/90-18 (3.25-18)	56P	101	4.0	637	25.1	2.5	224	494	32	225

9811



SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-16	59P	109	4.3	604	23.8	2.5	243	536	32	225

9817

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
130/90-15	66P	129	5.1	615	24.2	3.0	265	584	32	225
140/90-15	70H	143	5.6	633	24.9	3.5	335	739	32	225
60/80-17	27P	60	2.4	528	20.8	1.4	97.5	215	32	225
70/80-17	35P	69	2.7	544	21.4	1.6	121	267	32	225
80/80-17	41P	80	3.1	560	22	1.85	145	320	32	225
110/70-17	54P	110	4.3	586	23.1	3.0	212	467	32	225
70/80-18	41P	69	2.7	569	22.4	1.6	125	276	32	225
80/80-18	42P	80	3.1	585	23.0	1.85	150	331	32	225
80/90-18	45P	80	3.1	601	23.7	1.85	165	364	32	225
90/90-18	51P	88	3.5	624	24.6	2.15	195	430	32	225

9817A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/80-17	52P	98	3.9	598	23.5	2.5	200	441	32	225
120/70-17	58H	119	4.7	599	23.6	3.0	236	520	32	225
130/70-17	62H	128	5.0	630	24.8	3.5	265	584	32	225
140/60-17	63H	134	5.3	622	24.5	3.75	272	600	32	225
140/70-17	66H	134	5.3	622	24.5	3.75	300	661	32	225
90/80-18	47P	90	3.5	601	23.7	2.15	175	386	32	225
100/80-18	53P	101	4.0	617	24.3	2.5	206	454	32	225
100/90-18	56P	101	4.0	637	25.1	2.5	224	494	32	225

Motorcycle-Street

9817B

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/80-16	60P	119	4.7	598	23.5	2.75	250	551	32	225
130/90-16	67P	129	5.1	640	25.2	3.0	307	677	32	225
120/80-17	61S	120	4.7	630	24.8	2.75	257	567	32	225

9817N

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-14	43P	70	2.8	484	19.1	1.6	118	260	32	225
80/90-14	40P	78	3.1	504	19.8	1.85	140	309	32	225
70/90-16	36P	69	2.7	532	20.9	1.6	125	276	32	225
80/90-16	43P	80	3.7	550	21.7	1.85	155	342	32	225
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225
90/80-17	46P	88	3.5	576	22.7	2.15	170	375	32	225

9818

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/90-17	38P	70	2.8	564	22.2	1.6	132	291	32	225
80/90-17	44P	78	3.1	570	22.4	1.85	160	353	32	225

9819

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-16	43P	80	3.1	576	22.7	1.85	155	342	32	225

9820

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-16	40P	76	3.0	558	22.0	1.85	140	309	32	225



Motorcycle Dual sport

7301

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
110/90-18	61P	109	4.3	655	25.8	2.5	257	567	32	225
2.75-21	45P	75	3.0	689	27.1	1.85	165	364	32	225

7305

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/100-18	59M	101	4.0	657	25.9	2.5	243	536	32	225
3.50-18	56M	101	4.0	657	23.7	2.5	243	536	32	225



7306

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
3.00-17	45M	80	3.1	602	23.7	1.85	165	364	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225
2.75-18	42M	74	2.9	610	24.0	1.85	150	331	32	225
3.00-18	47M	80	3.1	627	24.7	1.85	175	386	32	225
4.10-18	60M	104	4.1	671	26.4	2.15	280	617	32	225
3.00-19	49M	80	3.1	653	25.7	1.85	185	408	32	225
2.75-21	45M	75	3.0	689	27.1	1.85	165	364	32	225

7309

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225

7311

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225

7312

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-14	43P	80	3.1	516	20.3	1.85	155	342	32	225
110/90-16	59P	109	4.3	604	23.8	2.5	243	536	32	225
90/90-17	49P	90	3.5	594	23.4	2.15	185	408	32	225
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
120/80-17	61P	119	4.7	624	24.6	2.75	257	567	32	225
120/90-17	64P	119	4.7	648	25.5	2.75	280	617	32	225
2.50-17	38P	68	2.7	568	22.4	1.6	132	291	32	225
2.75-17	41P	74	2.9	586	23.1	1.85	145	320	32	225
2.75-18	42P	74	2.9	610	24.0	1.85	150	331	32	225
3.50-18	56M	93	3.7	648	25.5	2.15	224	494	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225
120/80-18	62P	119	4.7	649	25.6	2.75	265	584	32	225
90/90-19	51M	90	3.5	645	25.4	2.15	200	441	32	225
90/90-21	54M	90	3.5	695	27.4	2.15	212	467	32	225

7315

Winter/Snow Tyre

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-18	42P	75	3.0	613	24.1	1.85	150	331	32	225
90/90-18	51M	90	3.5	619	24.4	2.15	195	430	32	225

7321

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/90-17 (4.60-17)	64P	122	4.8	656	25.8	2.75	280	617	32	225
4.60-18	63P	126	5.0	680	26.8	2.75	272	600	32	225
3.00-21	51P	80	3.1	710	28.0	1.85	200	441	32	225

9009

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
90/90-18	51P	90	3.5	619	24.4	2.15	195	430	32	225
90/90-19	52P	90	3.5	645	25.4	2.15	200	441	32	225

Motorcycle-Dual sport

Motocross

7302

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-10	37J	71	2.8	399	15.7	1.75	128	282	36	225

7303

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.75-10	37J	71	2.8	399	15.7	1.75	128	282	36	225
2.50-12	36J	65	2.6	441	17.4	1.5	125	276	36	225
2.75-12	40M	71	2.8	450	17.7	1.75	140	309	36	225
3.00-12	50J	80	3.1	464	18.3	2.1	132	291	36	225
80/100-12	50J	80	3.1	465	18.3	1.85	190	419	36	225

7307

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/100-18	64M	118	4.6	474	18.7	2.5	280	617	32	225
100/90-19	57M	110	4.3	672	26.5	2.5	230	507	32	225
110/90-19	62M	118	4.6	685	27.0	2.5	265	584	32	225
120/90-19	66M	132	5.2	695	27.4	2.75	300	661	32	225

7307F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-21	51M	84	3.3	693	27.3	1.85	195	430	32	225

7310

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
2.50-10	33J	65	2.6	390	15.4	1.5	115	254	36	225

7314

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
60/100-14	30M	64	2.5	476	18.7	1.4	103	227	32	225

7314F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
70/100-17	40M	76	3.0	576	22.7	1.6	140	309	32	225
70/100-19	42M	76	3.0	625	24.6	1.6	150	331	32	225

7316

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
90/100-14	49M	92	3.6	540	21.3	2.15	185	408	32	225
90/100-16	52M	92	3.6	586	23.1	2.15	195	430	32	225

7317

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/90-18	71N	128	5.0	680	26.8	2.75	290	639	32	225

7323

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
100/100-18	59M	101	4.0	657	25.9	2.5	243	536	32	225
120/100-18	68M	120	4.7	697	27.4	2.75	315	694	32	225

7323F

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
80/100-21	51M	80	3.2	693	27.3	1.85	195	430	32	225

7324

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/90-17	60P	109	4.3	630	24.8	2.5	250	551	32	225
120/80-18	62P	119	4.7	649	25.6	2.75	265	584	32	225
90/90-19	51M	90	3.5	645	25.4	2.15	200	441	32	225
90/90-21	54M	90	3.5	695	27.4	2.15	212	467	32	225

7326

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/100-17	63P	109	4.3	652	25.7	2.5	272	600	32	225
90/90-19	51M	90	3.5	645	25.4	2.15	200	441	32	225
90/100-16	52M	92	3.6	586	23.1	2.15	195	430	32	225

ATV

526

Winter/Snow Tyre

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
130/70-8	42L	128	5.0	380	15.0	3.5	150	330	40	275

FR-100

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
28X10R14	75J	241	9.5	703	27.7	7.0	387	853	12	83
30X10R14	79J	246	9.7	756	29.8	7.0	437	963	12	83
32x10R14	95J	254	10.0	818	32.2	7.0	690	1521	12	83
32x10R-15	94J	250	9.8	810	31.9	7.0	670	1477	12	83
35x10R15	97J	269	10.6	883	34.8	7.0	730	1609	12	83

702

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT145/70-6	4	136	5.4	350	13.8	4.5	-	-	4	40

704

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT145/70-6	4	136	5.4	350	13.8	4.5	-	-	4	40

711

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT19x7.00-8	4	179	7.0	480	18.9	5.5	-	-	5	34
AT18x9.50-8	4	244	9.6	455	17.9	8.0	-	-	5	34

712

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT18x9.50-8	44P	255	10.0	465	18.3	8.0	-	-	5	34

713

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT25x8-12	6	211	8.3	629	24.8	7.0	153	340	7	48
AT25x10-12	6	245	9.6	626	24.6	8.0	153	340	7	48

715

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT20x10-9	4	250	9.8	503	19.8	8.0	-	-	5	34
AT22x10-9	4	256	10.1	543	21.4	8.0	-	-	5	34

716

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT20x10R9	4	265	10.4	497	19.6	8.0	-	-	5	34

717

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
120/60-8	4	116	4.6	338	13.3	4.0	-	-	32	225

718

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
160/40-10	4	148	5.8	390	15.4	4.0	-	-	32	225

719R

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT16x8.00-7	4	180	7.1	385	15.2	5.2	-	-	5	34

722

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT19x7.00-8	4	179	7.0	480	18.9	5.5	-	-	5	34
AT21x7.00-10	4	179	7.0	515	20.3	5.5	-	-	5	34

723

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT25x8R12	4	203	8.0	635	25.0	6.5	-	-	5	34
AT25x8R12	6	203	8.0	635	25.0	6.5	-	-	7	48
AT25x10R12	4	254	10.0	635	25.0	8.0	-	-	5	34
AT26x9R12	6	235	9.3	645	25.4	7.0	-	-	7	48
AT26x12R12	6	304	12.0	640	25.2	9.5	-	-	7	48
AT27x9R12	4	229	9.0	686	27.0	7.0	-	-	5	34
AT27x12R12	4	305	12.0	686	27.0	9.5	-	-	5	34
AT26x9R14	6	231	9.1	645	25.4	7.0	-	-	7	48
AT26x11R14	4	279	11.0	737	29.0	9.0	-	-	5	34
AT26x11R14	6	280	11.0	645	25.4	8.0	-	-	7	48
29x9R14	6	228	9.0	737	29.0	7.0	-	-	12	83
29X11R14	6	280	11.0	737	29.0	8.0	-	-	12	83

724

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT22x7.00-10	4	181	7.1	539	21.2	5.5	-	-	5	34
AT22x7.00-11	4	178	7.0	559	22.0	5.5	-	-	5	34

726

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT22x10.00-9	4	253	10.0	549	21.6	8.0	-	-	5	34
AT22x10.00-10	4	248	9.8	547	21.5	8.0	-	-	5	34

727

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT21x10.00-8	4	267	10.5	529	20.8	8.0	-	-	5	34

727A

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
22x11-10	6	270	10.6	595	23.4	8.0	-	-	7	48

728

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT24x8.00-12	4	217	8.5	592	23.3	7.0	-	-	5	34
AT24x10.00-12	4	245	9.6	610	24.0	8.0	-	-	5	34

729

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
27X9.00R14	8	690	27.2	223	8.8	7.0	-	-	15	103
27X11.00R14	8	690	27.2	271	10.7	7.0	-	-	15	103
28x10.00R14	8	254	10.0	711	28.0	7.0	-	-	15	103
30x10.00R14	8	251	9.9	775	30.5	7.0	-	-	15	103
32x10.00R14	8	254	10.0	813	32.0	7.0	-	-	15	103
29x10.00R15	8	254	10.0	737	29.0	7.0	-	-	15	103
32x10.00R15	8	254	10.0	813	32.0	7.0	-	-	15	103
33x10.00R15	8	250	9.8	835	32.8	7.0	-	-	15	103
35x10.00R15	8	254	10.0	889	35.0	7.0	-	-	15	103

731 S14

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
28x13-14	8	335	13.2	774	30.5	10.5	-	-	35	245

731A S28

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
28x13-14	8	335	13.2	774	30.5	10.5	-	-	35	245

733

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT16x8.00-7	4	184	7.3	390	15.3	5.2	-	-	3	20

735

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT25X8-12	4	210	8.3	624	24.6	7.0	-	-	5	34
AT25x10-12	4	246	9.7	628	24.7	8.0	-	-	5	34

736

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
AT28x10-14	8	244	9.6	706	27.8	8	-	-	10	69

737

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
30x9.5R15	8	241	9.5	762	30.0	7.5	640	1411	30	210

Slick Kart

501

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
4.10/3.50-4	2	87	3.4	265	10.4	2.5	-	-	20	140
11x3.50-5	2	102	4.0	282	11.1	3.0	-	-	20	140
11x4.50-5	2	124	4.9	270	10.6	4.5	-	-	20	140
11x6.00-5	2	181	7.1	269	10.6	6.6	-	-	20	140

503

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
10x4.50-5	4	128	5.0	256	10.1	4.5	-	-	20	140

505

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
10x3.60-5	4	120	4.7	246	9.7	4.5	-	-	20	140
11x6.00-5	4	182	7.2	268	10.6	6.6	-	-	20	140
11x7.10-5	4	198	7.8	282	11.1	6.6	-	-	20	140
205/470-13	6	198	7.8	470	18.5	7	-	-	12	83

505SL

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
10.5x4.50-6	4	167	6.6	258	10.2	6.6	-	-	7	40
11x6.00-6	4	186	7.3	268	10.6	8.0	-	-	7	40
11.5x8.00-6	4	256	10.1	270	10.6	10.0	-	-	7	40
12x8.00-6	4	258	10.2	276	10.9	10.0	-	-	7	40
12x9.00-6	4	258	10.2	276	10.9	10.0	-	-	7	40

521

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
12x4.00-5	4	93	3.7	300	11.8	2.5	-	-	50	350

524

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
11.5x4.00-5	4	116	4.6	292	11.5	2.5	-	-	36	250

556

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
110/55R6.5	4	106	4.2	277	10.9	2.5	-	-	36	250
90/65R6.5	4	90	3.5	285	11.2	2.5	-	-	36	250

(Slick Kart)

Dirt & Rain Kart

506

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
11x5.00-5	4	150	5.9	285	11.2	4.5	-	-	20	140

508

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
12x7.00-6	4	186	7.3	305	12.0	8	-	-	20	140
12x8.00-6	4	255	10	305	12.0	10	-	-	20	140
12x9.00-6	4	258	10.2	305	12.0	10	-	-	20	140

519

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
10x4.20-5	4	126	5.0	256	10.1	4.5	-	-	20	140

520

SIZE	Ply Rating	Unloaded Dimension				Rim Width (inch)	Max. Load		Max. Infl Pressure	
		SW		OD						
		mm	inch	mm	inch		kgs	lbs	PSI	kPa
11x6.00-5	4	180	7.1	270	10.6	6.6	-	-	20	140

(Dirt & Rain Kart)

Factory 1

No.11, Sec.1, Yuanji Rd., Shetou Township, Changhua County 511002,Taiwan
TEL : +886-4-8739001 FAX : +886-4-8739012
E-mail : unilli-tyre1@unilli.com

Factory 2

No.1-6, Douyuan E. Rd., Pitou Township, Changhua County 52345, Taiwan
TEL : +886-4-8877052 FAX : +886-4-8877349
E-mail : unilli-tyre@unilli.com

UNILLI TYRE INTERNATIONAL CO., LTD.
ACME RUBBER INDUSTRY CO., LTD.

unilli

www.unilli.icom